

DUO 4 MINI

SPECIFICATION SHEET
STATIC WHITE

ELEGANT 4 INCH UP AND DOWN LUMINAIRE

Housing

Diameter : Ø4.8" | Height : 9" | Weight : 7.5 lbs

Material

Housing : Extruded Aluminum
Lens : Clear polycarbonate

Power Input

Downlight : 15W | 120-277V
Uplight : 15W | 120-277V

Lumen Output

Downlight : 1,250 lm (15W)
Uplight : 1,250 lm (15W)

Dimming

Superior 0-10V : Dims to 1%
TRC : Linear line-voltage phase control, dims to 1%
LDE1 : Hi-Lume 1% EcoSystem LED Driver with Soft-on, Fade-to-Black
DMX : High resolution dims to 0.1% (RJ45 only)
(Supports ANSI E1.20 RDM protocol)

Color Quality

CRI 85, CRI 93 | UGR ≤ 19

Rated Life

> 100,000 Hours (L70)


Finish




Color Temperature



Optics



Mounting



Warranty

5 Year limited warranty


Listing



Revolutionary Mounting System

Perfect for highlighting beautiful ceiling spaces, the embedded Powerline™ System offers a highly aesthetic fixture, with a less than 1-inch canopy option for that truly quiet ceiling design.

Available in a range of dimming capabilities including DMX, this added technology does not compromise the look and feel of the luminaire and is done through a hidden signal wire that can also offer separate uplight and downlight dimming controls.

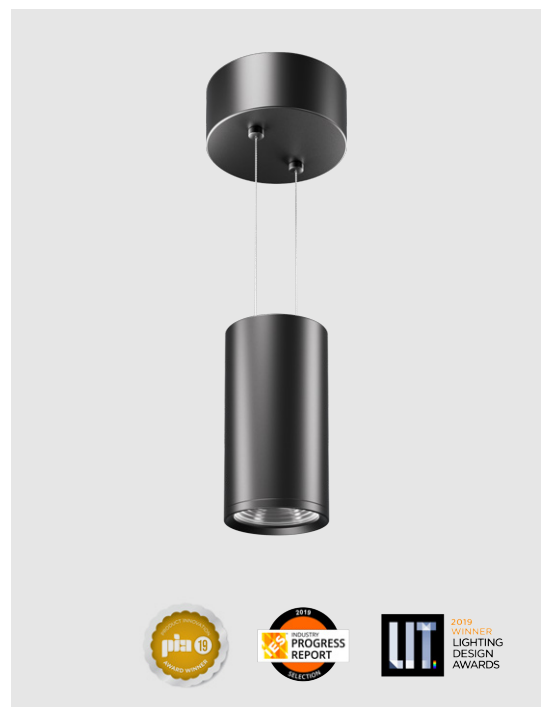

SPECIFICATION

PROJECT NAME	<input type="text"/>	DATE	<input type="text"/>
CATALOG #	<input type="text"/>	QUANTITY	<input type="text"/>

The product configurator function on this page works only with the latest version of Chrome or Adobe Acrobat Reader.

<input type="text" value="DUO4M"/>	MODEL	DUO 4 MINI		
<input type="text" value="30"/>	WATTAGE	30 Downlight: 15W Uplight: 15W		
<input type="text"/>	CCT / CRI	278 2700K / CRI 85 309 3000K / CRI 93	279 2700K / CRI 93 359 3500K / CRI 93	308 3000K / CRI 85 408 4000K / CRI 85
<input type="text" value="UNV"/>	VOLTAGE	UNV 120 – 277V		
<input type="text"/>	DIMMING ¹	NOD Non-Dimming LDEI Hi-Lume 1% EcoSystem LED Driver with Soft-on, Fade-to-Black (Up/Down together)	SPVS Superior 0-10V dims to 1% (Single – Up/Down together) DMXRS DMX dims to 0.1% (Single – Up/Down together, RJ45)	TRC¹ Linear line-voltage phase control, dims to 1% (Up/Down together)
<input type="text"/>	BEAM ANGLE	Downlight		
<input type="text"/>		20 20° 60 60°	30 30° WD² Wide	45 45°
<input type="text"/>	BEAM ANGLE	Uplight		
<input type="text"/>		35 35°	60 60°	WD² Wide
<input type="text"/>	FINISH	BLK Black	WHT White	
<input type="text"/>	MOUNTING	PL#(2/4/6/8/10)³ Power Line Mount (2, 4, 6, 8, and 10 ft.)	PL#RM(2/4/6/8/10)³ Power Line Mount With Remote Power(2, 4, 6, 8, and 10 ft.)	
<input type="text"/>	ACCESSORIES	EMP Remote Emergency Pack		

CLEAR FORM

¹ TRC is only compatible with 120V
² Please factor in change in lumen output of -20% with WD
³ Replace “#” with the required length designation. ex: PL2, PL4

TECHNICAL DETAILS

Electrical

- Downlight : 1,250 lm (15W)
- Uplight : 1,250 lm (15W)
- Power Input : Universal (120-277V)
- Operating Temperature : -13°F~104°F
- Surge Protection : Built-in is 2.5KV
- Power Factor Greater than 0.9
- Remote Emergency Pack : Bodine BSL20B2UEK55C111

LED Features

- Color Temperature : 2700K, 3000K, 3500K, 4000K
- CRI 85, CRI 93
- UGR ≤ 19
- Long lasting LED luminaire tested under TM21 lumen maintenance L70 @ 100,000 Hrs

Optics

- Precision molded high transmittance clear lenses
- Beam Angle Down : 20°, 30°, 45°, 60°, WD
- Beam Angle Up : 35°, 60°, WD

Advanced Dimming

- Proprietary VX Driver™ is integrated across all dimming options, delivering video flicker-free performance and full compliance with IEEE 1789.
- Superior 0-10V : Superior 0-10V dims to 1%
- TRC : Linear line-voltage phase control, dims to 1%
- LDE1 : Hi-Lume 1% EcoSystem LED Driver with Soft-on, Fade-to-Black
- DMX : high resolution dims to 0.1% (Supports ANSI E1.20 RDM protocol)

Housing

- Diameter : Ø4.8"
- Height : 9"
- Material : Extruded Aluminum
- Weight : 7.5 lbs
- Canopy Height : 2.9"

Mounting

- Power Line Mount 2ft, 4ft, 6ft, 8ft, 10ft with High Lumen Power Suspension (Canopy Height : 2.95")
- Power Line Mount 2ft, 4ft, 6ft, 8ft, 10ft with High Lumen Power Suspension and Remote Power (Canopy Height : 0.84")

Warranty

- 5-year limited warranty

Listing

- ETL Damp Location Listed

PERFORMANCE SUMMARY*

Delivered Lumens				
CCT/WATTAGE	2700K	3000K	3500K	4000K
30W UP (15W)	1,110lm	1,160lm	1,195lm	1,250lm
30W DOWN (15W)	1,110lm	1,160lm	1,195lm	1,250lm

Current Consumption		
WATTAGE / VOLT	120V	277V
30W	0.28A	0.12A


*Tolerance ±8%

*For specifications requiring a CRI of 93, apply a 0.8 multiplier to the lumen output values listed.


PHOTOMETRICS

Below is a typical photometric representation of the Duo 4 fixture. Please download IES files to ensure exact photometric value.


Downlight :




20°




30°



45°




60°




WIDE


Uplight :



35°



60°



WIDE


DMX REQUIREMENTS

The Duo 4 Mini fixture with DMX unit has **two channels** per fixture (1 to control uplight, 1 to control downlight). When placing an order, please indicate DMX address. (The DMX address will be listed on the back of the fixture). Do not connect more than 32 fixtures per DMX daisy chain.

DMX Address		
Fixture	Uplight (ex. X)	Downlight (ex. X+1)
#1	1	2
#2	3	4
#3	5	6

The fixture can be connected with RJ45 sockets. DMX cables **are not** included; please refer to compatible DMX cabling list for more information. The final fixture on each daisy chain should be terminated by the use of a DMX terminator purchased from a 3rd party or from Meteor.

CONNECTION	RJ45 (CAT5e)
Common	WHITE/BROWN(PIN7) & BROWN (PIN 8)
Signal -	ORANGE (PIN 2)
Signal +	WHITE/ORANGE (PIN 1)
Spare	-
Spare	-



COMPATIBLE DMX CABLING LIST

DMX uses a cable consisting of two twisted pairs plus a shield to carry data. The cable must be specifically impedance matched for the digital DMX signal, meaning that microphone cable or other non-rated cable **must not be used to carry DMX**. Network cable (Cat5, 5e or 6 cable) may be used to carry DMX in an installation; however special consideration must be given to shielding and termination. Under no circumstances should solid core cable like Cat5 be terminated into a screw down connector.

Meteor recommends the use of Belden 9729 or Belden 9841 for DMX installation. Belden 9729/9841 is a two pair cable, which allows for a spare pair for 'out and back' type terminations if needed.




COMPATIBLE TRC DIMMER LIST

PART NO.					
Lutron S-603PG	Lutron DVCL-153P	Lutron DVLV-600P	Lutron TGCL-153P	Lutron S-600P	Lutron DVELV-303P
Lutron SELV-300P	Lutron TG-600P	Lutron DVLV-600P	Lutron LG-600P	Lutron CT-103P	Lutron MAELV-600
Lutron FAELV-500	Leviton IPI06-1LZ	Leviton 6631-2	Leviton VPE06	Leviton 6683-IW	Leviton 6161
Leviton 6633-P	Leviton IPE04	Cooper DLC03P	Cooper SLC03P	Cooper DAL06P	Lightolier ZP260QEW

COMPATIBLE Lutron DIMMER LIST

LUTRON PART NO.						
RMJ-ECO32-DV-B	FCJ/FCJS-ECO	QSN-1ECO-S	QSN-2ECO-S	QSGRJ-_E	QSGR-_E	QP2-_ _ 2C
QP2-_ _ 4C	QP2-_ _ 6C	QP2-_ _ 8C	LQSE-2ECO-D			

DIMENSIONS

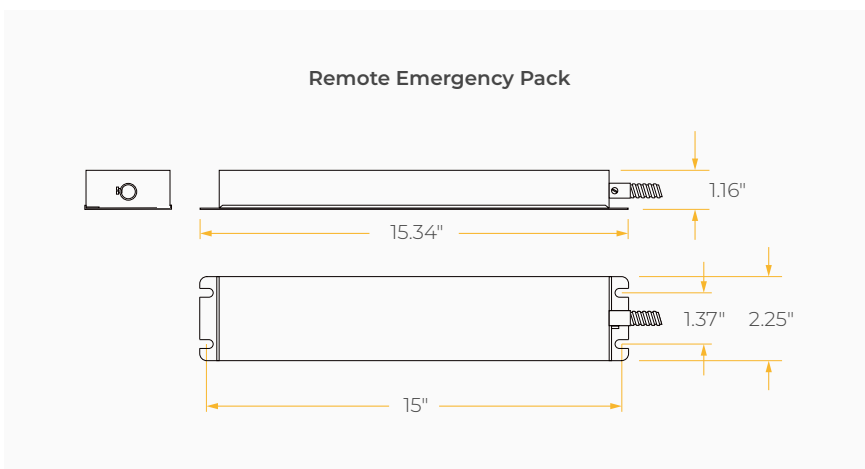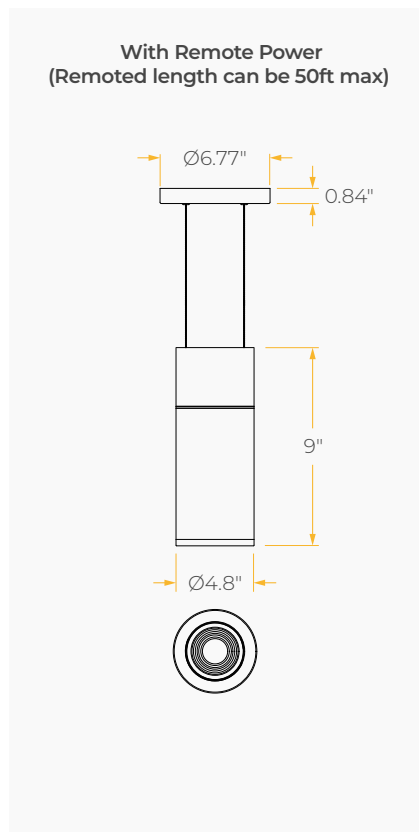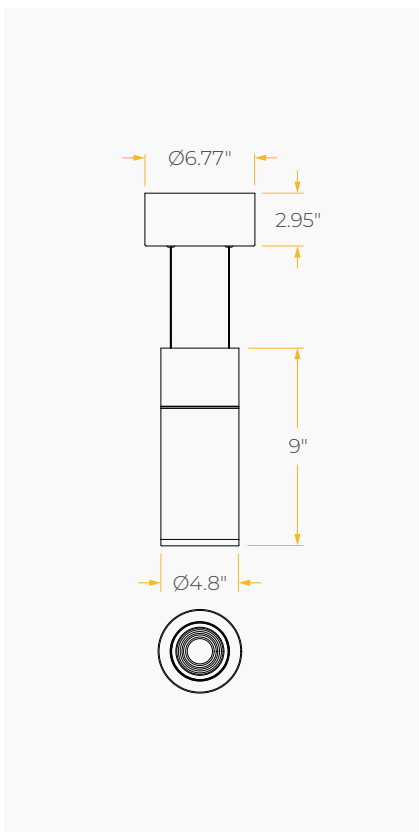

MOUNTING OPTIONS*

*Junction Box not included

