

LANCE 6

ARCHITECTURAL GRADE OUTDOOR WALL LUMINAIRE

Housing

Diameter : Ø1.5" | Height : 8.5" | Weight : 1.3 lbs

Material

Housing: High Pressure Die-Cast Aluminum

Lens: Tempered Glass

Power Input

60W | 120/277V

Lumen Output

4,285 lm (60W) Uplight: 30W / Downlight: 30W

Dimming

DMX: High resolution dims to 0.1%

Color Quality

CRI 85, CRI 93

Rated Life

> 60,000 Hours (L70)

Finish



Black



White



Gray



Bronze

Color Temperature



2700K



3000K



3500K



4000K

Optics



40°



60°



Wide

Warranty

5 Year limited warranty

Listing




SPECIFICATION SHEET RGB UPLIGHT / WHITE DOWNLIGHT

Designed for Timeless Exteriors

This 6-inch round wall mount cylinder boasts an impressive lumen range of 3,940 to 4,285 lm, providing exceptional illumination while making a bold architectural statement. The RGB uplight version of the Lance 6 is a testament to the perfect harmony between decorative and functional design.

The IP65 rated Lance 6 ensures durability and reliability in all outdoor environments, making it the ideal choice for accentuating architectural features and enhancing outdoor facades.

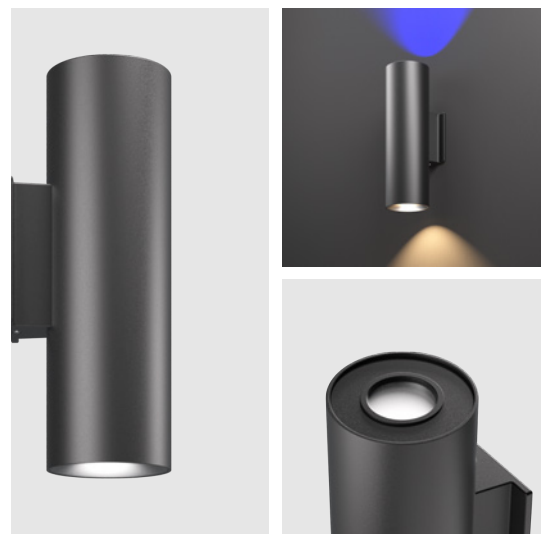

SPECIFICATION

PROJECT NAME	DATE
<input type="text"/>	<input type="text"/>
CATALOG #	QUANTITY
<input type="text"/>	<input type="text"/>

LA6	MODEL	LANCE 6		
60	WATTAGE	60 Downlight: 30W Uplight: 30W		
<input type="text"/>	CCT / CRI	Downlight		
RGB		278 2700K / CRI 85	279 2700K / CRI 93	308 3000K / CRI 85
		309 3000K / CRI 93	358 3500K / CRI 85	359 3500K / CRI 93
		408 4000K / CRI 85	409 4000K / CRI 93	
		Uplight		
		RGB RGB		
UNV	VOLTAGE	UNV 120 – 277V		
DMX	DIMMING	DMX¹ DMX dims to 0.1%		
<input type="text"/>	BEAM ANGLE	Downlight		
<input type="text"/>		40 40°	60 60°	WD² Wide
<input type="text"/>		Uplight		
		40 40°	60 60°	WD² Wide
<input type="text"/>	FINISH	BLK Black BRZ Bronze	WHT White	GRY Gray
<input type="text"/>	ACCESSORIES	NO No Accessories FW^{6,7} Forward Throw	WW⁶ Wall Wash 20°	LL⁶ Linear Lens
<input type="text"/>	RATING	OUT³ Outdoor Rating	NAT⁴ Natatorium Rated	MAR⁵ Marine Finish

¹ Only available with 4 channels, all channels are controlled separately
² Please factor in change in lumen output with WD -20%
³ Outdoor Rating: Coating and wiring will be changed to high UV resistant and corrosion resistant materials for long-term operation in outdoor environments
⁴ Natatorium Rating: Coating and sealant will be changed to high corrosion resistant materials to prevent damage from long-term exposure to chlorine vapors
⁵ Marine Rating: Uses high corrosion-resistant materials for the coating and sealant to prevent damage from long-term exposure to saltwater environment
⁶ Please factor in change in lumen output of -20%
⁷ Not compatible with 60° and WD option

TECHNICAL DETAILS

Electrical

- 4,285 lm (60W) Uplight: 30W / Downlight: 30W
- Power Input: Universal (120/277V)
- Operating Temperature: 14°F~104°F
- Surge Protection: Built-in is 2.5KV

LED Features

- Color Temperature: 2700K, 3000K, 3500K, 4000K
- Uplight: Wavelength R 645 nm, G 520 nm, B 445 nm
- CRI 85, CRI 93
- Long lasting LED luminaire tested under TM21 lumen maintenance L70 @ 60,000 Hrs

Optics

- Precision molded high transmittance clear PC lens
- Beam Angle: Uplight & Downlight 40°, 60°, Wide

Advanced Dimming

- Proprietary VX Driver™ is incorporated to all dimming options for video flicker-free lighting
- DMX: High resolution dims to 0.1% (Supports ANSI E1.20 RDM protocol)

Housing

- Diameter: Ø1.5"
- Height: 8.5"
- Material: High Pressure Die-Cast Aluminum, Tempered Glass
- Weight: 1.3 lbs

Warranty

- 5-year limited warranty

Listing

- ETL Wet Location Listed
- CE
- FCC
- IP 65

PERFORMANCE SUMMARY*


	Delivered Lumens		
	R	G	B
Uplight(30W)	150lm	1,010lm	120lm
Downlight(30W)	2700K	3000K	3500K
	2,660lm	2,890lm	2,960lm
		4000K	3,005lm

Current Consumption		
WATTAGE / VOLT	120V	277V
60W	0.55A	0.24A


*Tolerance ±8%

PHOTOMETRICS


Below is a typical photometric representation of the Lance 6 fixture. Please download IES files to ensure exact photometric value.



40°



60°



Wide

DMX REQUIREMENTS

The Lavce 6 W+RGB fixture with DMX is a **four channel dmx** unit. When placing an order, please indicate DMX address. (The DMX address will be listed on the back of the fixture). Do not connect more than 32 fixtures per DMX daisy chain.

Fixture	DMX Address			
	Red Control (ex. X)	Green Control (ex. X+1)	Blue Control (ex. X+2)	White Control (ex. X+3)
#1	1	2	3	4
#2	5	6	7	8
#3	9	10	11	12

The fixture can be connected with 2 DMX positive / negative wires for connection. DMX cables **are not** included; please refer to compatible DMX cabling list for more information. The final fixture on each daisy chain should be terminated by the use of a DMX terminator purchased from a 3rd party or from Meteor.

COMPATIBLE DMX CABLING LIST

DMX uses a cable consisting of two twisted pairs plus a shield to carry data. The cable must be specifically impedance matched for the digital DMX signal, meaning that microphone cable or other non-rated cable **must not be used to carry DMX**. Network cable (Cat5, 5e or 6 cable) may be used to carry DMX in an installation; however special consideration must be given to shielding and termination. Under no circumstances should solid core cable like Cat5 be terminated into a screw down connector.

Meteor recommends the use of Belden 9729 or Belden 9841 for DMX installation. Belden 9729/9841 is a two pair cable, which allows for a spare pair for 'out and back' type terminations if needed.

DIMENSIONS

