

SIGNUM 8

SPECIFICATION SHEET

SLEEK AND AESTHETIC
HIGH CEILING CYLINDER

Housing

Diameter : Ø8.26" | Height : 9.25" | Weight : 11.02 lbs

Material

Housing: High Pressure Die-Cast Aluminum

Lens: Clear Polycarbonate

Power Input

45W | 120-277V

Lumen Output

4,220 lm (45W)

Dimming

Standard 0-10V: Dims to 10%

Superior 0-10V: Dims to 1%

DMX: High resolution dims to 0.1% (Supports ANSI E1.20 RDM protocol)

TRC: Line-voltage phase control, dims to 1% (120V only)

Color Quality

CRI 85

Rated Life

> 100,000 Hours (L70)

Finish



Black



White

Color Temperature



2700K



3000K



3500K



4000K



5000K

Optics



25°



40°



60°



Wide

Mounting



Stem
Mount



Adjustable
Cable



Surface
Mount



Wall
Mount



Yoke
Mount

Warranty

5 Year limited warranty

Listing



Dual Chamber Design For Maximum Performance

The Signum 8 is a 8-inch aperture cylinder that feature a lumen package range of 3,230 lm – 4,220 lm. Compatible with a wide variety of mounting, dimming and optic selections. Perfect for general illumination and high ceiling applications.



METEOR

meteor-lighting.com

SPECIFICATION SHEET

SIGNUM 8 SLEEK AND AESTHETIC HIGH BAY CYLINDER



SPECIFICATION

PROJECT NAME	DATE
<input type="text"/>	<input type="text"/>
CATALOG #	QUANTITY
<input type="text"/>	<input type="text"/>

SS8	MODEL	SIGNUM 8		
45	WATTAGE	45 45W		
	CCT / CRI	278 2700K / CRI 85 408 4000K / CRI 85	308 3000K / CRI 85 508 5000K / CRI 85	358 3500K / CRI 85
UNV	VOLTAGE	UNV 120 – 277V		
	DIMMING	STV Standard 0-10V dims to 10% DMX(RJ45) DMX dims to 0.1% (RJ45 Sockets)	SPV Superior 0-10V dims to 1% TRC Line-voltage phase control, dims to 1%	DMX DMX dims to 0.1% (XLR Sockets)
	BEAM ANGLE	25 25° WD Wide	40 40°	60 60°
	FINISH	BLK Black	WHT White	
	MOUNTING	SUM Surface Mount AD10 Adjustable Cable 10ft SAD10 Sloped Adjustable Cable 10ft	ST2 Stem 2ft WLM Wall Mount	ST4 Stem 4ft YKM Yoke Mount
	ACCESSORIES	NO No Accessories CT² Conduit Mount	SPD¹ Surge Protector	EMP Remote Emergency Pack

¹ Surge protector for up to 10KV. Applicable for unstable mains or facilities using high power machineries
² CT only compatible with ST and AD mounting types

SPECIFICATION SHEET

SIGNUM 8

SLEEK AND AESTHETIC
HIGH BAY CYLINDER



TECHNICAL DETAILS

Electrical

- 4,220 lm (45W)
- Power Input: Universal (120-277V)
- Operating Temperature: -13°F~112°F
- Surge Protection: Built-in is 4KV
- Power Factor Greater than 0.9
- Remote Emergency Pack: Bodine BSL20B2UEK55C111

LED Features

- Color Temperature: 2700K, 3000K, 3500K, 4000K, 5000K
- CRI 85
- Long lasting LED luminaire tested under TM21 lumen maintenance L70 @ 100,000 Hrs

Optics

- Precision molded high transmittance clear PC lens
- Beam Angle: 25°, 40°, 60°, Wide

Advanced Dimming

- Proprietary VX Driver™ is incorporated to all dimming options for video flicker-free lighting
- Standard 0-10V: Dims to 10%
- Superior 0-10V: dims to 1%
- DMX: high resolution dims to 0.1% (Supports ANSI E1.20 RDM protocol)
- TRC: Line-voltage phase control, dims to 1% (120V only)

Housing

- Diameter: Ø8.26"
- Height: 9.25"
- Material: High Pressure Die-Cast Aluminum, PC Lens
- Weight: 11.02 lbs

Mounting

- Surface Mount
- Stem 2ft or 4ft; 37° Swivel Canopy Included
- Adjustable Cable 10ft
- Wall Mount
- Yoke Mount
- Sloped Adjustable Aircraft Cable 10ft

Warranty

- 5-year limited warranty

Listing

- ETL Dry Location Listed
- CE
- UKCA

PERFORMANCE SUMMARY*

	Delivered Lumens				
CCT/WATTAGE	2700K	3000K	3500K	4000K	5000K
45W	3,230lm	3,350lm	3,490lm	3,770lm	4,220lm


	Current Consumption	
WATTAGE / VOLT	120V	277V
45W	0.47A	0.2A

*Beam Angle: 25° *Tolerance ±8%

Emergency Pack Lumen Output Table				
CCT	2700K	3000K	4000K	5000K
LUMEN	1,640lm	1,760lm	1,890lm	1,950lm

PHOTOMETRICS


Below is a typical photometric representation of the Signum 8 fixture. Please download IES files to ensure exact photometric value.

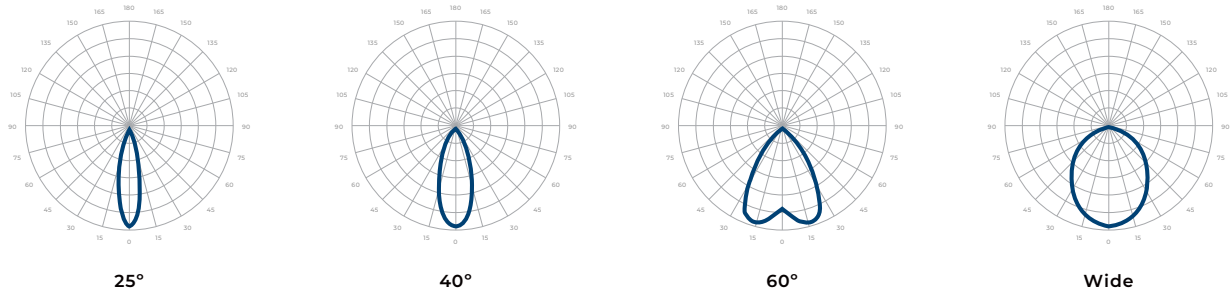

DMX REQUIREMENTS

The Signum 8 fixture with DMX is a **one channel** DMX unit.
 When placing order, please indicate DMX address. (The DMX address will be listed on the back of the fixture.)
 The LED fixture provide RJ45 Socket or XLR socket to connect. (DMX cable **not** included.)
 The final fixture should be terminated by the use of DMX Terminator (by others).

CONNECTION	RJ45 (CAT5e)	5-PIN XLR
Common	WHITE/BROWN(PIN7) & BROWN (PIN 8)	PIN 1
Signal -	ORANGE (PIN 2)	PIN 2
Signal +	WHITE/ORANGE (PIN 1)	PIN 3
Spare	-	PIN 4
Spare	-	PIN 5

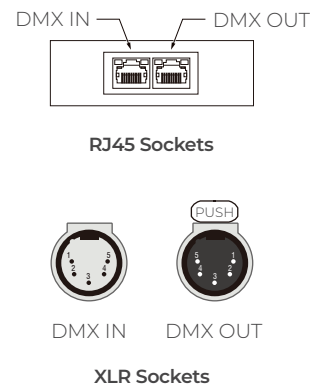

COMPATIBLE DMX CABLING LIST

DMX uses a cable consisting of two twisted pairs plus a shield to carry data. The cable must be specifically impedance matched for the digital DMX signal, meaning that microphone cable or other non-rated cable **must not be used to carry DMX**. Network cable (Cat5, 5e or 6 cable) may be used to carry DMX in an installation; however special consideration must be given to shielding and termination. Under no circumstances should solid core cable like Cat5 be terminated into a screw down connector.

Meteor recommends the use of Belden 9729 or Belden 9841 for DMX installation. Belden 9729/9841 is a two pair cable, which allows for a spare pair for 'out and back' type terminations if needed. Below is a list of other compatible Belden cables.

SPECIFICATION SHEET



SIGNUM 8 SLEEK AND AESTHETIC HIGH BAY CYLINDER




COMPATIBLE TRC DIMMER LIST

PART NO.					
Lutron S-603PG	Lutron DVCL-153P	Lutron DVLV-600P	Lutron TGCL-153P	Lutron S-600P	Lutron DVELV-303P
Lutron SELV-300P	Lutron TG-600P	Lutron DVLV-600P	Lutron LG-600P	Lutron CT-103P	Lutron MAELV-600
Lutron FAELV-500	Leviton IPI06-1LZ	Leviton 6631-2	Leviton VPE06	Leviton 6683-IW	Leviton 6161
Leviton 6633-P	Leviton IPE04	Cooper DLC03P	Cooper SLC03P	Cooper DAL06P	Lightolier ZP260QEW

DIMENSIONS

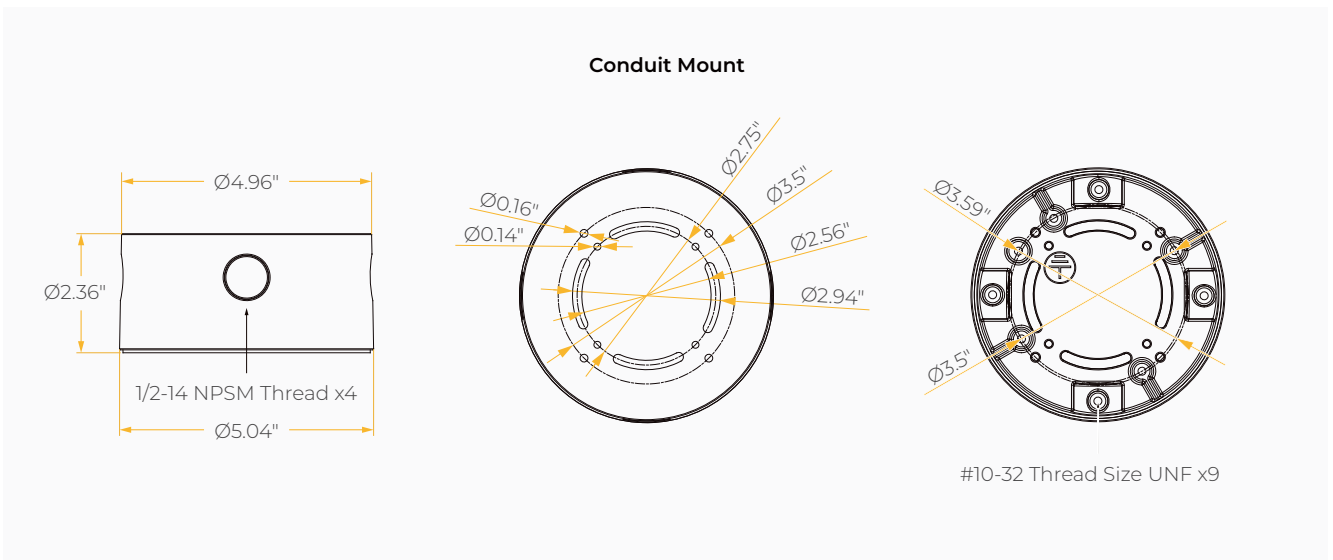
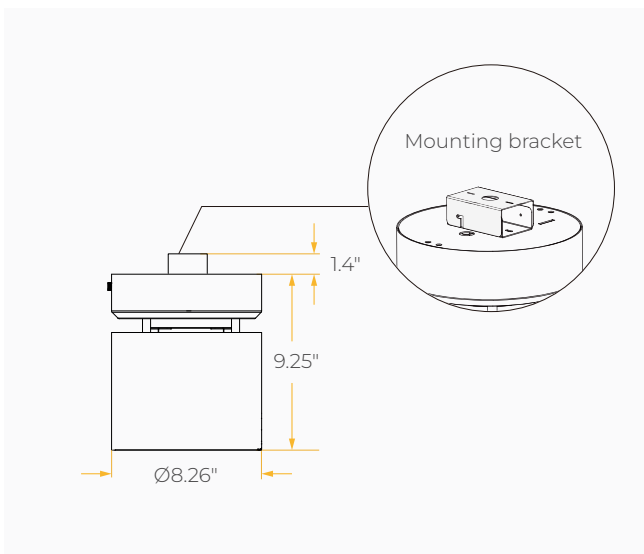


DIMENSIONS

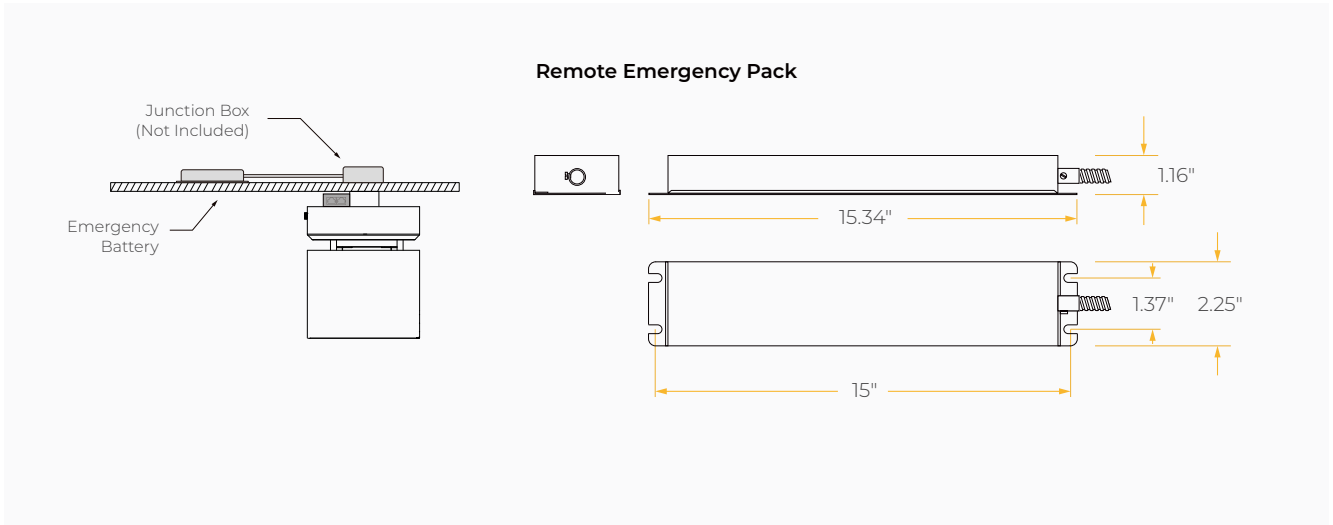

MOUNTING OPTIONS*

*Junction Box not included

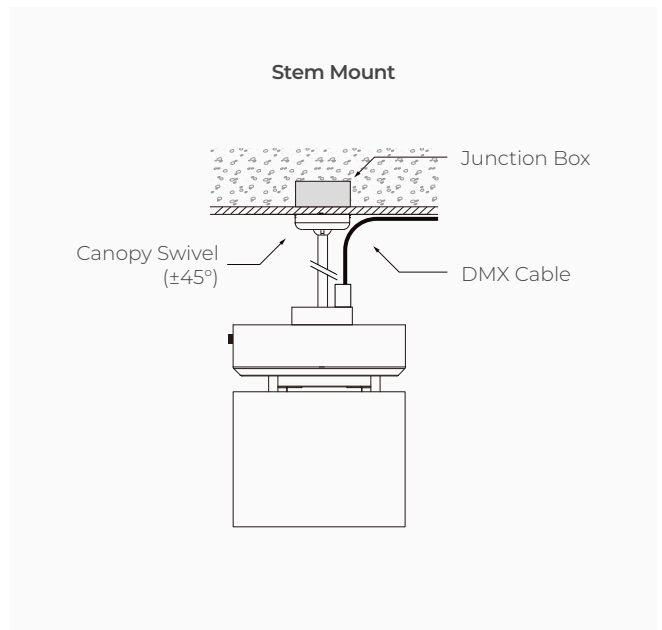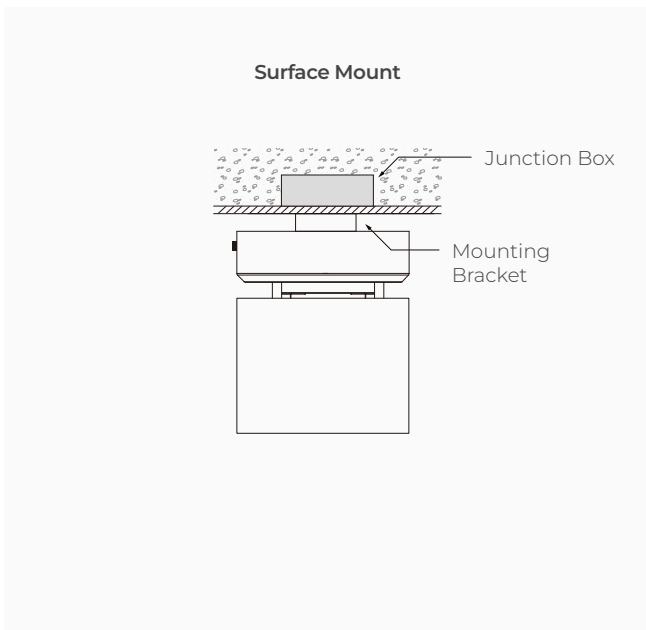

MOUNTING OPTIONS*

*Junction Box not included

